

941 SENSORS AND ACTUATORS


BATHROOM CALL UNIT WITH CANCELLATION

Code : **9410350**

Model : **LLC-821**

Description


Bathroom pull-cord touch version with an antibacterial coating. It is formed by a two meters cord, two push buttons and a red reassurance LED indicator. It allows to launch an emergency call by pulling the pull-cord or pressing the red call button. Once the call is initiated, the red LED indicator allows an easy identification of the call status. The call can be cancelled pressing the cancel button. The LLC-821 has an anti-strangle mechanism that allows the separation of the pull-cord into two parts to avoid accidents. The installation can be embedded or superficial.

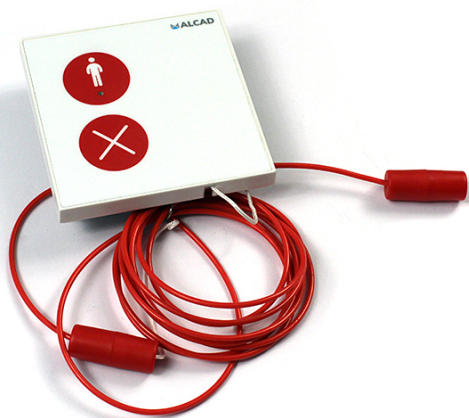

CODIGO/ CODE/ CODE	9410349, 9410350 9410361, 9415056	9410368, 9410369 9415015
MODELO/ MODEL/ MODÈLE	LLC-82X	LLC-92X
Tirador Pull Cord Tirette	Longitud, Length, Longueur: 2m Color: Rojo, Color: Red, Couleur: Rouge Mecanismo de 6Kg de anti-estrangulamiento; 6kg anti strangle mechanism; Mécanisme de 6kg anti-étranglement	
Pulsador Push button Bouton	Verde, Green, Vert: ,LLC-X24 Rojo, Red, Rouge: LLC-X20, LLC-X21, LLC-X24	
Alimentación Power supply Alimentation électrique	24V	
Consumo (stand by) Energy consumption (stand by) Consommation (stand by)	10 mA	
Consumo (máx.) Energy consumption (max.) Consommation (max.)	40 mA	
Dimensiones Size Dimensions	80x80x10mm	
Peso Weight Poids	0,08Kg	
Material Material Matériel	ABS/Polycarbonate/Polycarbonate	
Color Color Couleur	Blanco, White, Blanc (RAL 9001)	
Temperatura operacional Operating temperature Température de fonctionnement	5°C - 55°C	
Indice de protección Protection Indice de Protection	IP 55	
Instalación Mounting Installation	Empotrado, Embedded, Encastré (ACC-100 / ACC-101) En superficie, On surface, En saillie (ACC-110)	

CODIGO/ CODE/ CODE	9410349, 9410350 9410361, 9415056	9410368, 9410369 9415015
MODELO/ MODEL/ MODÈLE	LLC-82X	LLC-92X
Normativa (seguridad y accesibilidad) Normative (security and accessibility) Norme (sécurité et accessibilité)	EN 60950-1:2006 CTE DB-SUA:2019	
Normativa (emisiones electromagnéticas) Normative (electromagnetic emissions) Norme (champs magnétique)	EN 61000-3-3	
Conector de red Net Connector Connexion	Bornas, Contact: 82X	RJ45: LLC-92X

ESQUEMA/SCHEMA/SCHEME

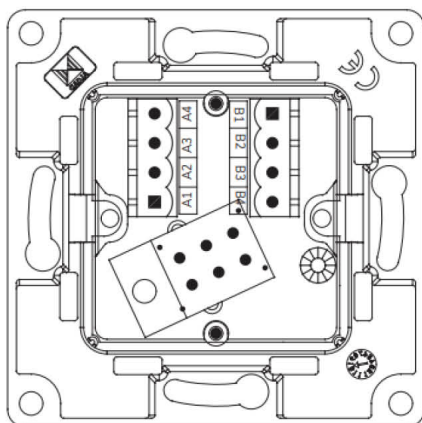

LLC-820

	ES	EN	FR	I/O*
A1	—	—	—	
A2	Tirador de llamada	Call pull cord	Tirette d'appel	Input
A3	—	—	—	
A4	—	—	—	
B1	Luz roja	Red light	Lumière rouge	Output
B2	Pulsador de llamada	Call button	Boutton d'appel	Input
B3	GND	GND	Masse	
B4	Alimentación 24 V	Power supply 24 V	Alimentation 24V	

* Consultar MANAGER para ver el número de borna correspondiente.

* Check MANAGER to see the corresponding terminal number.

* Consulter MANAGER pour voir le numéro chaque borne.