


# 912 TV-SAT AND MODULATOR EQUIPMENT

## POWER SUPPLY 50 W (110 VAC)

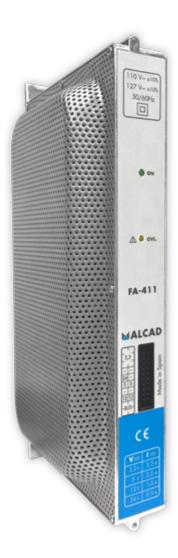

Code: 9120249

Model : **FA-411** 

#### Description

Switching power supply, which permits the installation of an amplifier and different modules on the support frame. Power supply with a flat cable of 20 lines for different feed voltages.

### **Applications**

Required for feeding the modules of the equipment.

#### Characteristics

Protected against power surges, overloads and short-circuits. Zamak chassis with side gills to facilitate proper ventilation. Supplied with power cable.



| CODE                                 |    | 9120245  |      | 9120249                                |     | 9120168        |      |       |     |
|--------------------------------------|----|--|------|--|-----|----------------|------|-------|-----|
| MODEL                                |    | FA-410   |      | FA-411                                 |     | FA-312         |      |       |     |
| Output voltage                       | V  | +3.3   | +5.2 | +12.0                                  | +24 | +3.3           | +5.2 | +12.0 | +24 |
|                                      | mA | 5500   | 2500 | 1500                                   | 500 | 10000          | 5000 | 1500  | 500 |
| Peak to peak ripple<br>voltage       | mV | >50  |      |  |     | 100            |      |       |     |
| Mains voltage                        | V~ | 230 ±20% 50/60 Hz<br>240 <sup>+15%</sup> 50/60 Hz<br>-20% 50/60 Hz |      | 110 ±10% 50/60 Hz<br>127 ±10% 50/60 Hz |     | 90264 50/60 Hz |      |       |     |
|                                      | W  |  |      | 72                                     |     | 85             |      |       |     |
| Operating temp. close to equipment   | °C | -10+65   |      |  |     |                |      |       |     |
| Room tmperature with/<br>without fan | °C | -10+55/+45   |      |  |     |                |      |       |     |
| Protection index                     |    | IP 20C   |      |  |     |                |      |       |     |
| Units per packaging                  |    | 1  |      |  |     |                |      |       |     |
| Packing weight                       | Kg | 1.43   |      |  |     | 1.65           |      |       |     |
| Packing dimensions                   | mm | 270 x 165 x 60   |      |  |     |                |      |       |     |