

941 SENSORS AND ACTUATORS

ACTIVE CEILING BATHROOM PULLCORD



Code : **9415066**


Model : **LLC-929**

Bathroom handle ACTIVE without buttons with antibacterial coating. It consists only of a two-meter cable that exits from the front of the device, allowing installation on the ceiling. Allows you to initiate an emergency call by pulling the cord. Once the call is started. The call can be canceled from an external device. The LLC-829 has an anti-strangulation mechanism that allows the separation of the cord into two parts avoiding accidents. The installation can be embedded or superficial. Bus peripheral with RJ45 connector.

CODIGO/ CODE/ CODE	9410349, 9410350 9410361, 9415056	9410368, 9410369 9415015
MODELO/ MODEL/ MODÈLE	LLC-82X	LLC-92X
Tirador Pull Cord Tirette	Longitud, Length, Longueur: 2m Color: Rojo, Color: Red, Couleur: Rouge Mecanismo de 6Kg de anti-estrangulamiento; 6kg anti strangle mechanism; Mécanisme de 6kg anti-étranglement	
Pulsador Push button Bouton	Verde, Green, Vert: ,LLC-X24 Rojo, Red, Rouge: LLC-X20, LLC-X21, LLC-X24	
Alimentación Power supply Alimentation électrique	24V	
Consumo (stand by) Energy consumption (stand by) Consommation (stand by)	10 mA	
Consumo (máx.) Energy consumption (max.) Consommation (max.)	40 mA	
Dimensiones Size Dimensions	80x80x10mm	
Peso Weight Poids	0,08Kg	
Material Material Matériel	ABS/Polycarbonate/Polycarbonate	
Color Color Couleur	Blanco, White, Blanc (RAL 9001)	
Temperatura operacional Operating temperature Température de fonctionnement	5°C - 55°C	
Indice de protección Protection Indice de Protection	IP 55	
Instalación Mounting Installation	Empotrado, Embedded, Encastré (ACC-100 / ACC-101) En superficie, On surface, En saillie (ACC-110)	

CODIGO/ CODE/ CODE	9410349, 9410350 9410361, 9415056	9410368, 9410369 9415015
MODELO/ MODEL/ MODÈLE	LLC-82X	LLC-92X
Normativa (seguridad y accesibilidad) Normative (security and accessibility) Norme (sécurité et accessibilité)	EN 60950-1:2006 CTE DB-SUA:2019	
Normativa (emisiones electromagnéticas) Normative (electromagnetic emissions) Norme (champs magnétique)	EN 61000-3-3	
Conector de red Net Connector Connexion	Bornas, Contact: 82X	RJ45: LLC-92X

ESQUEMA/SCHEMA/SCHEME

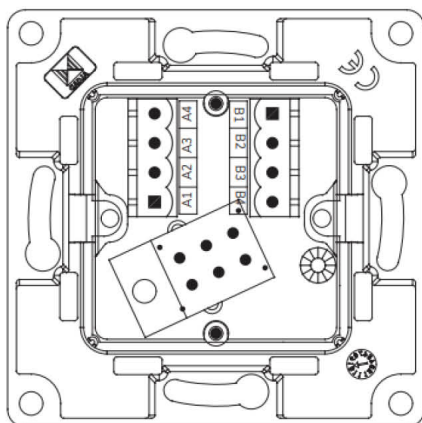

LLC-820

	ES	EN	FR	I/O*
A1	—	—	—	
A2	Tirador de llamada	Call pull cord	Tirette d'appel	Input
A3	—	—	—	
A4	—	—	—	
B1	Luz roja	Red light	Lumière rouge	Output
B2	Pulsador de llamada	Call button	Boutton d'appel	Input
B3	GND	GND	Masse	
B4	Alimentación 24 V	Power supply 24 V	Alimentation 24V	

* Consultar MANAGER para ver el número de borna correspondiente.

* Check MANAGER to see the corresponding terminal number.

* Consulter MANAGER pour voir le numéro chaque borne.