

# 907 OUTLETS AND USER ACCES POINTS


IF USER ACCESS POINT, IF SPLITTER 6 OUT

Code : **9070126**

Model : **PT-620**

## Description

User access point for terrestrial and satellite TV. It has two inputs and six outputs. One of the inputs remains connected to the outputs while the other input is permanently connected to a 75 ohm load. Designed for the 5-2,400 MHz frequency range. Also available in 2-, 3-, 4-, 5- and 8-output models.

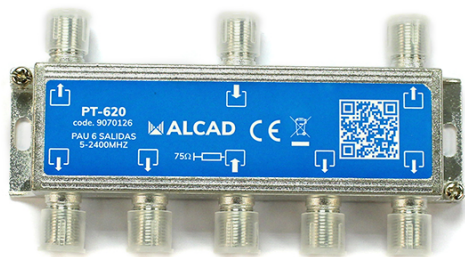

## Applications

Designed for TV installations with two coaxial cables in which distribution to the houses is performed with a single coaxial cable. The signal which is distributed to the house is selected by changing the connections of the coaxial cables at the user access point.

## Characteristics

Voltage blockage in the output connectors. No return path. Shielded zamak and metal plate chassis. F type connectors in machined zamak which form part of the chassis. Reduced dimensions.

CÓDIGO-CODE-CODE		9070122	9070123	9070124	9070125	9070126	9070127	
MODELO-MODEL-MODELE		PT-220	PT-320	PT-420	PT-520	PT-620	PT-820	
Conexión Connection Raccordement		F hembra F female F femelle						
Salidas Outputs Sorties		2	3	4	5	6	8	
Rango de frecuencias Frequency range Gamme de fréquences	MHz	5 - 2400						
Atenuación de distribución Top loss Atténuation de répartition	dB	5-47 MHz	3,5	7,5	8,5	11,5	11,5	12,5
		47-862 MHz	4,0	7,0	8,5	11,0	11,0	12,5
		950-2150 MHz	5,5	10,0	10,5	14,5	14,5	16,0
		2150-2400 MHz	6,0	10,5	11,5	15,0	15,5	16,5
Planitud en banda Flatness response Ondulation das la bande	dB	±0,3						
Planitud en canal Channel flatness response Ondulation das le canal	dB	±0,1						
Desacoplo Isolation Découplage	dB	5-47 MHz	>16	>19	>20	>26	>26	>22
		47-862 MHz	>28	>23	>29	>26	>25	>25
		950-2150 MHz	>22	>20	>16	>25	>24	>18
		2150-2400 MHz	>20	>25	>18	>27	>27	>17
Pérdida de retorno Return loss Pertes de retour	dB	5-47 MHz	>15	>10	>10	>10	>10	>10
		47-862 MHz	>15	>14	>12	>12	>12	>11
		950-2150 MHz	>11	>12	>9	>9	>8	>10
		2150-2400 MHz	>9	>12	>9	>9	>7	>10
Índice de protección Protection index Indice de protection		IP 20						
Unidades por embalaje Units per packing Unités per emballage		12						
Peso embalaje packing weight Poids emballage	Kg	0,89	0,91	1,67	1,74	1,69	1,75	
Dimensiones embalaje Packing dimensions Dimensions emballage	mm	235 x 85 x 85		270 x 130 x 90		270 x 125 x 85		