
941 SENSORS AND ACTUATORS

BATHROOM CALL UNIT WITH CANCELLATION

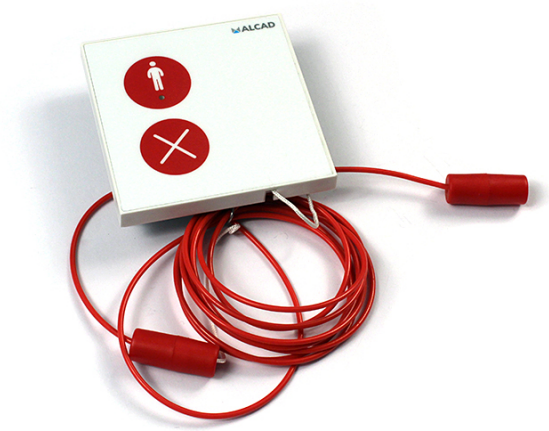

Code : **9410350**


Model : **LLC-821**

Description:
Touch-operated bathroom pull cord equipped with a two-metre cord, two buttons (call and cancel) and a red reassurance LED. Easy to clean thanks to the antibacterial coating on its front panel. An emergency call can be initiated by pulling the cord or pressing the red call button. The red LED indicates the call status, and the call can be cancelled using the corresponding button. It also features an anti-strangulation mechanism that allows the cord to separate into two parts to reduce the risk of accidents. Suitable for flush-mounted or surface-mounted installation.

CÓDIGO/ CODE/ CODE	9410350, 9415056	9410369, 9415066
MODELO/ MODEL/ MODÈLE	LLC-821, LLC-829	LLC-921, LLC-929
Tirador Pull Cord Tirette	Longitud, Length, Longueur: 2m Color: Rojo, Color: Red, Couleur: Rouge Mecanismo de 6kg de anti-estrangulamiento; 6kg anti strangle mechanism; Mécanisme de 6kg anti-étranglement	
Alimentación Power supply Alimentation électrique	24V	
Consumo (reposo) Energy consumption (stand by) Consommation (stand by)	10 mA	
Consumo (máx.) Energy consumption (max.) Consommation (max.)	40 mA	
Dimensiones Size Dimensions	80x80x10mm	
Peso Weight Poids	O,08kg	
Material Material Matériel	ABS / Polycarbonate / Polycarbonate	
Carátula con recubrimiento antibacteriano Antibacterial front overlay Face avant adhésive antibactérienne	Sí / Yes / Oui	
Color Colour Couleur	Blanco, White, Blanc (RAL 9001)	
Temperatura operacional Operating temperature Température de fonctionnement	5ºC - 55ºC	
Índice de protección Protection Indice de Protection	IP 55	
Instalación Mounting Installation	Empotrado, Embedded, Encastré (ACC-100 / ACC-101) En superficie, On surface, En saillie (ACC-110)	

CÓDIGO/ CODE/ CODE	9410350, 9415056	9410369, 9415066
MODELO/ MODEL/ MODÈLE	LLC-821, LLC-829	LLC-921, LLC-929
Normativa (seguridad y accesibilidad) Normative (security and accessibility) Norme (sécurité et accessibilité)	EN 60950-1:2006 CTE DB-SUA:2019	
Normativa (emisiones electromagnéticas) Normative (electromagnetic emissions) Norme (champs magnétique)	EN 61000-3-3	
Conector de red Net connector Connexion	Bornas, Contact, Bornes	RJ45

ESQUEMA / SCHEMA / SCHEME

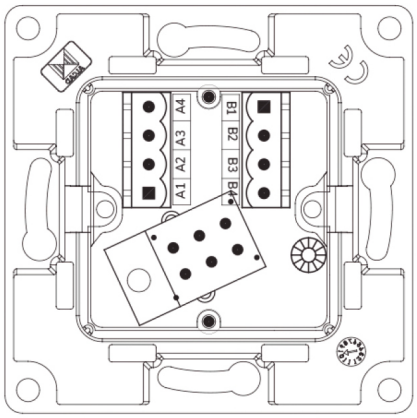

LLC-821, LLC-829

	ES	EN	FR	I/O*
A1	—	—	—	
A2	Tirador de llamada	Call pull cord	Tirette d´appel	Input
A3	—	—	—	
A4	—	—	—	
B1	Luz roja	Red light	Lumière rouge	Output
B2	Pulsador de llamada	Call button	Boutton d´apell	Input
B3	GND	GND	Masse	
B4	Alimentación 24 V	Power supply 24 V	Alimentation 24V	

* Consultar MANAGER para ver el número de borna correspondiente.
* Check MANAGER to see the corresponding terminal number.
* Consulter MANAGER pour voir le numéro chaque borne.