

905 MODULAR AMPLIFICATION EQUIPMENT

POWER SUPPLY 24 VDC 1.7 A (230/240 VAC)

Code : **9050083**

Model : **AS-125**

Description


Compact switching power supply units which permits the installation of up to 18 modules on the support frame.

Applications

Necessary to supply the amplification modules of the equipment. The number of modules which it can feed varies according to the consumption of the modules and of the consumption of the LNBS in the case of SAT amplifier modules. 18 modules can be fed in the case of monochannel amplifiers.

Characteristics

Protected against overloads and short-circuits. Made from an aluminium profile and aluminised plate. It includes a protection fuse which the installer can access. Supplied with power cable with faston connector for IEC connector equipment.

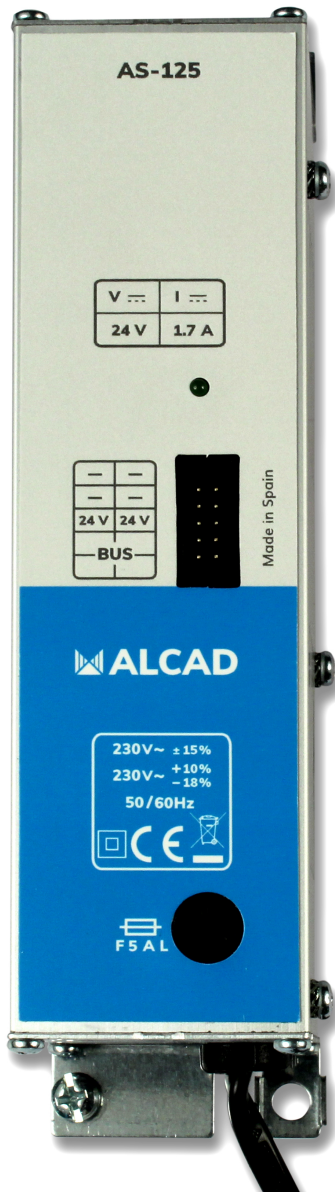

CODE		9050000	9050083
MODEL		AS-102	AS-125
Output voltage	V \equiv	+24	
Maximum output current	mA	1100	1700
Fuse	V \sim	250	
	A	5(Type F)	
Peak to peak ripple voltage	mV	<100	<200
Mains voltage	V \sim	230 \pm 15% 50/60 Hz	230 \pm 15% 50/60 Hz 240 $\begin{smallmatrix} +15\% \\ -20\% \end{smallmatrix}$ 50/60 Hz
	VA	50	70
Operating temperature	$^{\circ}$ C	-10..+65	
Protection index		IP 20	
Units per packing		1	
Packing weight	Kg	0.49	
Packing dimensions	mm	190 x 85 x 65	