


# 906 TAP-OFFS AND SPLITTERS

## TAP-OFF IF 6 OUT 20 DB

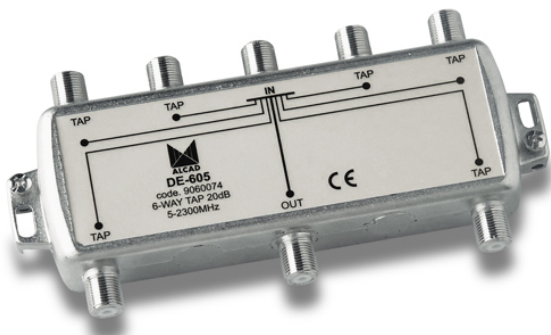

Code : **9060074**

Model : **DE-605**

### Description

Tap-offs for terrestrial and satellite TV with six tap outputs, covering the 5MHz to 2,300MHz frequencies. They distribute part of the input signal to their tap outputs while the main part of the signal continues to the output. The response of the tap outputs is flat, without equalisation. Available in different tap-off attenuation values.

### Applications

Collective terrestrial and satellite TV installations with an arborescent or tree-shaped distribution. The arborescent distribution reduces the number of distribution elements and the length of coaxial cable to be installed, even though the distances from head-end to outlet remain constant.

### Characteristics

Protection diodes in all the outputs. Shielded zamak chassis and metal plate. Zamak F-type connectors which form part of the tap-off chassis.

CODE		9060073	9060074	9060075
MODEL		DE-603	DE-605	DE-607
Connection		F female		
Outputs		6		
Frequency range	MHz	5 - 2300		
Tap loss ①	dB ±1.5	5-47 MHz 17.0 47-862 MHz 17.5 950-2150 MHz 21.0 2150-2300 MHz 21.5	21.0 21.0 24.5 26.5	26.0 25.0 27.5 30.0
Flatness response	dB	±0.3		
Channel flatness response	dB	±0.1		
Through loss ②	dB ±0.5	5-47 MHz 4.0 47-862 MHz 3.5 950-2150 MHz 6.0 2150-2300 MHz 7.5	1.5 1.5 3.0 3.5	1.5 1.5 3.0 3.5
Directivity ④	dB	5-47 MHz >14 47-862 MHz >14 950-2150 MHz >0 2150-2300 MHz >0	>12 >10 >0 >0	>16 >7 >0 >0
Isolation ⑤	dB	5-47 MHz >24 47-862 MHz >22 950-2150 MHz >20 2150-2300 MHz >22	>24 >24 >20 >19	>21 >20 >21 >25
Return loss	dB	5-47 MHz >10 47-862 MHz >10 950-2150 MHz >7 2150-2300 MHz >6	>10 >10 >8 >7	>10 >11 >9 >6
DC path	V <sub>DC</sub>	24 max		
	mA	500 max		
	Tono	22 KHz/DiSEqC		
Protection index		IP 20		
Units per packing		12		
Packing weight	Kg	2.88		
Packing dimensions	mm	440 x 155 x 57		