


# 912 TV-SAT AND MODULATOR EQUIPMENT

## POWER SUPPLY 50 W (110 VAC)

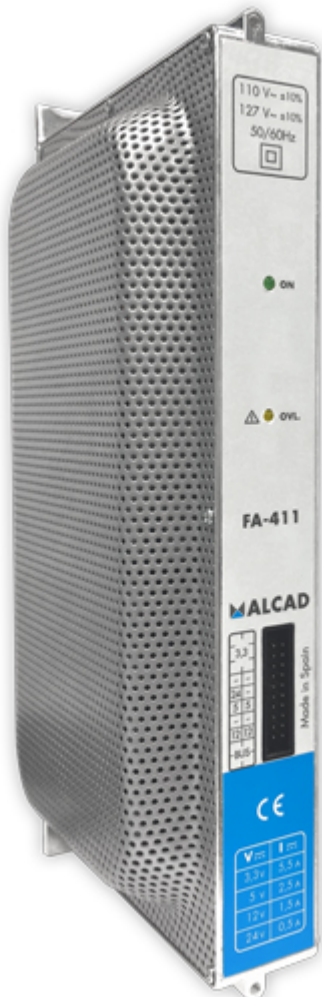

Code : **9120249**

Model : **FA-411**

### Description

Switching power supply, which permits the installation of an amplifier and different modules on the support frame. Power supply with a flat cable of 20 lines for different feed voltages.

### Applications

Required for feeding the modules of the equipment.

### Characteristics

Protected against power surges, overloads and short-circuits. Zamak chassis with side gills to facilitate proper ventilation. Supplied with power cable.

CODE	9120245		9120249		9120168				
MODEL		FA-410		FA-411		FA-312			
Output voltage	V $\overline{\text{---}}$	+3.3	+5.2	+12.0	+24	+3.3	+5.2	+12.0	+24
	mA	5500	2500	1500	500	10000	5000	1500	500
Peak to peak ripple voltage	mV	>50				100			
Mains voltage	V $\sim$	230 $\pm$ 20% 50/60 Hz 240 $\pm$ 15% 50/60 Hz -20% 50/60 Hz		110 $\pm$ 10% 50/60 Hz 127 $\pm$ 10% 50/60 Hz		90..264 50/60 Hz			
	W	72				85			
Operating temp. close to equipment	$^{\circ}$ C	-10..+65							
Room temperature with/ without fan	$^{\circ}$ C	-10..+55/+45							
Protection index		IP 20C							
Units per packaging		1							
Packing weight	Kg	1.43				1.65			
Packing dimensions	mm	270 x 165 x 60							